

TYPE 1

6" SPOUT

Pt. No.- **GEC13SLA150**

9" SPOUT

Pt. No.- **GEC13SLA225**



TYPE 2

6" SPOUT

Pt. No.- **GEC13G3006**

8" SPOUT

Pt. No.- **GEC13G3008**



Type 2 Can be fitted with Cable & Hook.
Add "**-CS**" to end of above codes if you
require this – SEE Over PAGE

Features:

- Suit Hot & / or Cold water
- Doust Jumper Valves.
- 6", 8" Swivel Spout.
- or 150 or 225 Laundry Arms
- Type 2 Can be Fitted with a S/S Clamp / Hook on Spout + S/S PVC coated Cable, Crimped onto special Support Bracket by installer.
- Cables allows Spout to Swivel & Support a bucket.
- Repair Kits Available

WARRANTY:

- 24 Months for Commercial use

Technical:-

Australian Standards : **Watermarked**

GEC13SLA150 / 225

WELS Reg. : T17878
WELS Rated : 3 Stars
Flow Rate : 8 lpm

GEC13G3006 / 8

WELS Reg. : TM41100
WELS Rated : 3 Stars
Flow Rate : 9 lpm

BOTH:

Mounting Hole : 1 x 25mm, 2 x 35mm
Breach : Hidden
Material : DZR Brass
Finish 1 : Chrome
Working Press. : 500kpa. (NPC)
Max. Press. rate : 1500kpa.
Operating Temp : 1 - 80° C.



Global Tapware Pty Ltd
E – sales.info@globaltapware.com
P – 07 38 55 2350
P – 1300 85 25 15
W- GLOBALTAPWARE.COM.AU





Must be installed by a licenced
Plumber in accordance with the
requirements of AS/NZS3500

The Cable Offers Support & Allows Spout to Swivel

FEATURES :-

Size	Reach	Pt No.
6"	165mm	G3006-CS
8"	215mm	G3008-CS

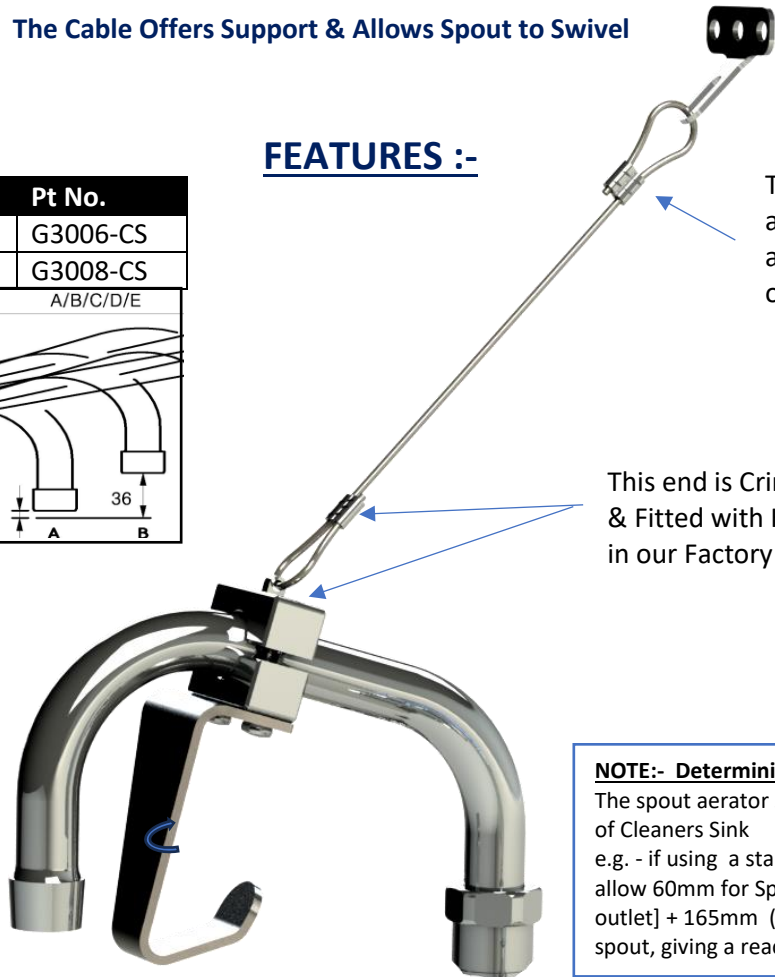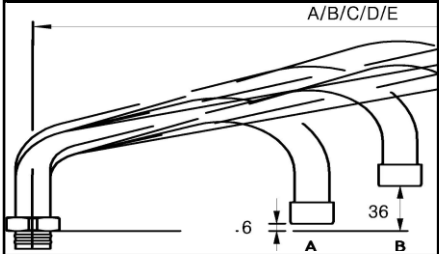


This end to adjusted, Cut and crimped on site

This end is Crimped & Fitted with Hook in our Factory

NOTE:- Determining the spout length.
 The spout aerator should reach approx. centre of Cleaners Sink
 e.g. - if using a standard 450mm sink then allow 60mm for Spout Elbow [Wall to Centre outlet] + 165mm (6") or 215mm (8") for spout, giving a reach total of 225 or 275mm .

GENERAL INFORMATION:

- 1 – Bucket Hook & Cable Brackets are made from 304 S/S.
- 2 – The Cable is S/S with a PVC Coating for Hygiene.
- 3 – The Wall Cable Bracket must be mounted to a stud or some other form to support weight. (This is the responsibility of Installer. If no support, then DO NOT fit and remove from spout.)
- 4 – Height positioning of the Wall Bracket is left to the installer to determine. Above is a guide.
- 5 - The two spout sizes are the best for filling bucket in the right position. Not Short / Not Long.
- 6 – All spouts are made from S/S tube and come with a highly polished or Chrome Plate finish.
- 7 – Installation is responsibility of installer and is not included in our warranty.

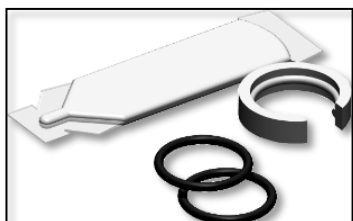

ITEM A:- Type 2 Spout Service Kit

Pt. No – G-SKIT